


Pin	Dimensions (mm/inch)				Ordering Code
	"A"	"B"	"C"		
6	7,62/.300	7,62 .300	10,16 .400		<b>PSO-306-H093-95</b>
8	10,16/.400			<b>PSO-308-H093-95</b>	
10	12,70/.500			<b>PSO-310-H093-95</b>	
14	17,78/.700			<b>PSO-314-H093-95</b>	
16	20,32/.800			<b>PSO-316-H093-95</b>	
18	22,86/.900			<b>PSO-318-H093-95</b>	
20	25,40/1.000			<b>PSO-320-H093-95</b>	
24	30,48/1.200	15,24 .600	17,78 .700		<b>PSO-624-H093-95</b>
28	35,56/1.400			<b>PSO-628-H093-95</b>	
32	40,64/1.600			<b>PSO-632-H093-95</b>	
36	45,72/1.800			<b>PSO-636-H093-95</b>	
40	50,80/2.000			<b>PSO-640-H093-95</b>	
48	60,96/2.400			<b>PSO-648-H093-95</b>	

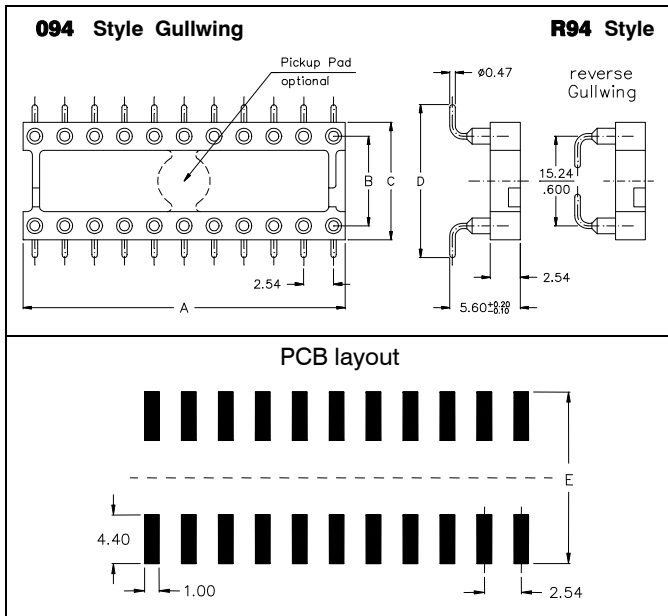

Pin	Dimensions (mm/inch)					Ordering Code
	"A"	"B"	"C"	"D"	"E" 094 Style	
10	12,70/.500	5,08 .200	7,62 .300	10,46 .412		<b>PSO-210-H094-95</b>
6	7,62/.300	7,62 .300	10,16 .400	13,00 .512	15,00 .590	<b>PSO-306-H094-95</b>
8	10,16/.400					<b>PSO-308-H094-95</b>
10	12,70/.500					<b>PSO-310-H094-95</b>
14	17,78/.700					<b>PSO-314-H094-95</b>
16	20,32/.800					<b>PSO-316-H094-95</b>
18	22,86/.900					<b>PSO-318-H094-95</b>
20	25,40/1.000				<b>PSO-320-H094-95</b>	
				"E" 094 Style	"E" R 94 Style	
24	30,48/1.20	15,24 .600	17,78 .700	20,70 .815	22,70 .894	<b>PSO-624-Hxxx-95</b>
28	35,56/1.40					<b>PSO-628-Hxxx-95</b>
32	40,64/1.60					<b>PSO-632-Hxxx-95</b>
40	50,80/2.00					<b>PSO-640-Hxxx-95</b>

<p><b>Body types</b></p> <p>Standard = Open frame (PSO Series)</p> <p>Optional = Closed frame (PSC Series)</p>	<p><b>Insulator</b></p> <p>high-temp plastic UL 94 V-0 (RoHS compliant)</p> <p>For further technical data refer to page 49</p>	<p><b>Temperature</b></p> <p>Operating temp. -55 °C to +125 °C</p> <p>Processing temp. +250°C +/-5°C for 20~40sec.</p>
--	--	--

How to order

PSO - x x x - H x x x - 95 ( / P )

if with Pickup Pad only 28- & 32-pin -others on request-

